


ROTAVATOR | B-16

Model	B16	105	125	155	180
Dimension, mm (L x W x H)		1235 x 955 x 935	1485 x 955 x 935	1735 x 955 x 935	1990 x 955 x 935
Working Width, cm		105	125	155	180
For Tractor, Hp		25hp	28-37hp	40-47hp	47-55hp
3-Point Linkage, CAT		I/II			
Universal Driveshaft		A6 c/w Shearbolts Torque Limiter			
Gearbox		Single Speed			
No of Flanges		5	6	7	8
No of Blades		24	30	36	42
Size of Blades, mm		75 x 6			
Rotor Speed at 540 rpm		210			
Side Transmission Drive		Rollerchain & Sprocket			
Max Working Depth, cm		16			
Type of Blade		L or C (Optional)			
Weight (kg)		270	290	310	340

L / C Blade

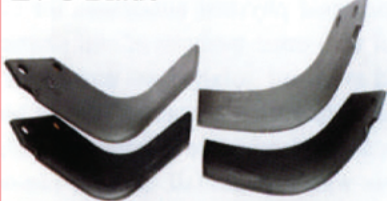

PTO Drive Shaft



Face Seal



B-16 is suitable on small farms, in paddy fields and in cash crop agriculture for primary and secondary tillage.

With optional bedformer kit it is equally useful for furrowing and preparing dry-land seedbeds for vegetable farming.

Compact and lightweight - with low horsepower requirement.

Bearings and other bought-in components are sourced from renowned international manufacturers.



Distributor

 **PT. SAHABAT AGRITAMA**

Alamat: No. 1. Blok B1 - B2 Jl. Gn. Sahari RT.16/RW. 3 Gn. Sahari Utara. Kecamatan Sawah Besar, Kota Jakarta Pusat, Daerah Khusus Ibukota Jakarta 10720

Informasi

 (021) 6594011

 082 125 406 086

 sahabatagritama@sahabatgroup.com

 www.sahabatagritama.com