

ROTASLASHER


HS/HSR
34/150
34/180

Model	HS/HSR	HS34/150	HSR34/150	HS34/180	HSR34/180
Dimension, mm (L x W x H)		1717 x 1713 x 1015	2030 x 1713 x 1015	2012 x 1967 x 1050	2325 x 1967 x 1050
Working Width, cm		150		180	
For Tractor, Hp		60-90hp		70-95hp	
3-Point Linkage, CAT		I/II			
Universal Driveshaft		A6 c/w FF2 Slip Clutch			
Blade Speed at 540 rpm		778			
Cutting Heights, cm		1 - 10			
No of Blades		2			
Size of Blades, mm		75 x 12			
With Front and Rear Roller		NO	YES	NO	YES
Type of Blade		Cranked and Swing			
Weight (kg)		300	340	380	440

Blade



Beam

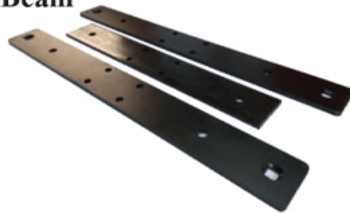

PTO Drive Shaft



A heavy-duty performer, HS 34 is equally suitable for road-side and plantations maintenance as for undergrowth clearing.

Fitted with clutch protection, this machine is capable of slashing bushes and small trees. Heavy-duty blades, mounted in hardened journal - swing back if hitting major objects. Universal PTO drive shaft with clutch



Distributor

 **PT. SAHABAT AGRITAMA**

Alamat: No. 1. Blok B1 - B2 Jl. Gn. Sahari RT.16/RW. 3 Gn. Sahari Utara. Kecamatan Sawah Besar, Kota Jakarta Pusat, Daerah Khusus Ibukota Jakarta 10720

Informasi

☎ (021) 6594011
☎ 082 125 406 086
✉ sahabatagritama@sahabatgroup.com
🌐 www.sahabatagritama.com