

GP[®]400



TRUSTED TO DELIVER SUPERIOR QUALITY OF CUT

The GP400 provides a flawless cut to greens, tee boxes and other manicured green spaces with your choice of Jacobsen Classic XP™ 7, 9 or 11-blade reels. With an ergonomically restyled dash featuring ample storage areas and one-touch joystick control, the GP400 makes operation easy and seamless. An exclusive swing-out reel, quick-release mounting system and a refined hydraulic system, with easy access to electrical components allow you to spend less time on maintenance and more time on the course.

.062 - .438"
HEIGHT OF CUT

**GAS
OR
DIESEL**


3.7 MPH
MOW SPEED

62"
WIDTH OF CUT



JACOBSEN® ADVANTAGE

For over 95 years, Jacobsen has been designing and manufacturing industry-leading turf maintenance equipment. A strong focus on engineering innovative technology has led to advancements that deliver impeccable quality of cut on user-friendly equipment.

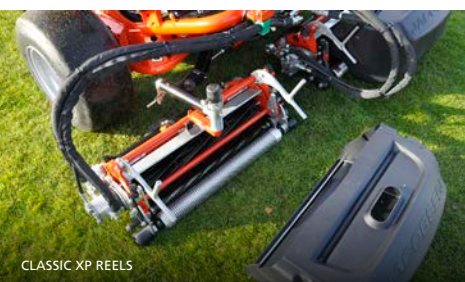

CLASSIC XP REELS



ONE-TOUCH JOYSTICK



PRECISION ON GREENS

EQUIPPED AS STANDARD

- Joystick Control
- Adjustable Mow Speed
- Adjustable Transport Speed
- On-board Backlapping
- Rear Unit Sequencing
- Front Reel Soft-Drop
- Automotive Handbrake
- Headlights
- GreensCare Biodegradable Hydraulic Fluid
- ROPS with Seat Belt
- Choice of 7, 9 or 11-blade XP Reels or Verticut Reel
- One-Piece Seat

OPTIONS

- Grass-Catcher Kit
- Automatic Mow Speed Selection Kit
- GP400 3WD Kit
- Full Lineup of Accessories

ENGINE	
TYPE	Diesel: Kubota® D722 3-cylinder Tier 4 Petrol: Briggs & Stratton® Vanguard™ V-twin
RATED HORSEPOWER*	13.2kW (17.7hp) @3200 rpm
DISPLACEMENT	Diesel: 719cc (43.88 cu. in.) / Petrol: 574cc (35 cu. in.)
AIR CLEANER SYSTEM	Dry, two stage
COOLING SYSTEM	Diesel: Pressurised, sealed cooling system; coolant capacity: 3.79L (1 gal.) / Petrol: Air-cooled
FUEL CAPACITY	56.8L (15 gal.)
TRACTION & DRIVE	
TRACTION DRIVE	Hydraulic motor on each drive wheel
REEL DRIVE	Gear-type hydraulic motor; backlap control valve standard
REEL LIFT HYDRAULIC SYSTEM	Hydraulic double action cylinders; parallel link head leveling system 25.7L (6.8gal.) capacity; 10 micron, full-flow filtration; biodegradable fluid; oil cooler standard
SPEED (MAXIMUM)	
MOWING	6 km/h (3.7mph)
TRANSPORT	Centrifugal
REVERSE	3.1 km/h (1.9 mph)
TIRES, BRAKES & STEERING	
TIRES	20 x 10-10, 2-ply pneumatic, tubeless
PARKING BRAKE	152 mm (6") caliper disc, hand operated
GROUND PRESSURE	Diesel: .98 kg/cm ² (14 psi) / Petrol: 0.7 kg/cm ² (10 psi)
STEERING	Power
REELS AND BLADES	
NUMBER AND SIZE	Three 55.9 cm (22") reels; 127 mm (5") diameter
NUMBER OF BLADES	7,9,11
BLADE MATERIAL	Hardened, high carbon steel
CUTTING FREQUENCY	.789 mm/kph (0.050 in/mph) with 11-blade reels
OVERALL CUTTING WIDTH	1.6 m (62")
HEIGHT-OF-CUT RANGE (Depending on turf condition and bedknife installed)	1.6mm - 11.1mm (0.062" - 0.438")
WEIGHT & DIMENSIONS	
WEIGHT	664 - 736kg (1463 - 1622lbs.)
LENGTH (LESS CATCHERS)	2.12m (83")
HEIGHT (WITH ROPS)	1.72m (67.7")
WHEELBASE	1.30m (51.2")
WIDTH-OF-CUT	1.30m (51.2")
WIDTH	1.89m (74.5")

* Engine horsepower is provided by engine manufacturer. Actual operating power output may vary due to conditions of specific use. NOTE: Specifications, while correct at time of printing, may change without notice.

Distributor



PT. SAHABAT AGRITAMA

(021) 6594011
www.sahabatagritama.com
Alamat: No. 1. Blok B1 - B2 Jl. Gn. Sahari RT.16/RW. 3
Gn. Sahari Utara. Kecamatan Sawah Besar
Kota Jakarta Pusat, Daerah Khusus Ibukota Jakarta 10720