

ECLIPSE 2 HYBRID

ELECTRIC HYBRID WALK-BEHIND REEL MOWER

JACOBSEN



- **TOURNAMENT LEVEL-OF-CUT**
- **ELECTRONIC CONTROLLED FREQUENCY OF CLIP**
- **HONDA® POWERED ELECTRIC GENERATOR**
- **INCOMMAND™ OPERATOR CONTROLS**

A century's experience comes together to give you the Eclipse 2 electric hybrid walk behind reel mower. Jake's Signature Cut Trusted by Generations is guaranteed with programmable settings that give you control to deliver consistency with every use, and greens that look and play how you want them.

The Eclipse 2 also features the Patented Jake true-floating head, a Honda® Powered Electric Generator and InCommand™ Operator Controls. The Eclipse 2 will ensure consistency to deliver fine sports turf surfaces.

CUT
WIDTH
18" OR 22"
(45.7CM OR 55.9CM)

CUT
HEIGHT
0.062" - 0.438"
(1.57MM - 11.13MM)

BLADES
PER REEL
11 OR 15

FUEL
CAPACITY
0.66 GAL
(2.5L)

MOWER
ENGINE
**HONDA®
CX-120
GAS ENGINE**

MOWER
POWER
4HP
HYBRID ELECTRIC
DRIVETRAIN



SINCERELY

Jake

Distributor

PT. SAHABAT AGRITAMA

Alamat: No. 1. Blok B1 - B2 Jl. Gn. Sahari RT.16/RW. 3 Gn. Sahari Utara. Kecamatan Sawah Besar, Kota Jakarta Pusat, Daerah Khusus Ibukota Jakarta 10720


Informasi

(021) 6594011
082 125 406 086
sahabatagritama@sahabatgroup.com
www.sahabatagritama.com

ECLIPSE 2 HYBRID

ELECTRIC HYBRID WALK-BEHIND REEL MOWER

JACOBSEN

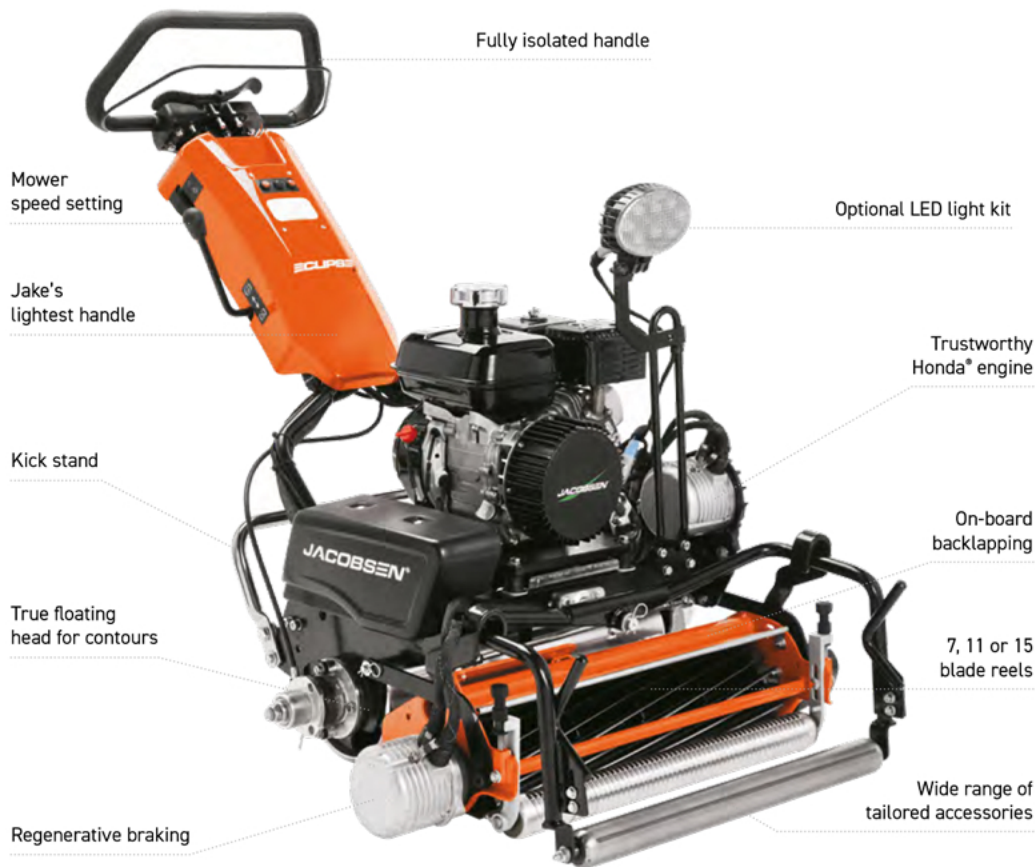

Superior aftercut appearance



Electronic frequency of clip setting



Grass catcher as standard

REELS & BLADES

BLADE MATERIAL	Hardened, high manganese carbon steel
REEL SPEED	Electronically controlled, 2200 RPM maximum
FREQUENCY OF CLIP	Programmable electronically controlled Frequency of Clip based on actual machine speed

TRACTION, BRAKES & SPEED

MOWER DRIVE SYSTEM	Honda® GX-120 gas engine driving a 48v brushless generator
TRACTION DRIVE	7.75" (19.68cm) diameter machine smoothed aluminum drum driven via a brushless DC motor and synchronous belt
OPERATOR PRESENCE CONTROL	Standard InCommand™ operator controls (Traction and Reel) with integrated Operator Presence Control
DIFFERENTIAL	Full automotive type, housed in traction drum
TRACTION DRUM	7.75" (19.68cm) diameter smooth machined aluminum
BRAKES	Lever actuated hub brake with parking lock
TRANSPORT WHEELS	2 x Pneumatic 11" x 4" (27.94cm x 10cm)
MOWING SPEED	Electronically controlled and programable 0-3.8 mph (6.12 km/h) max

WEIGHTS & DIMENSIONS

WEIGHT	18": 213lb (97kg), 22": 229lb (104kg), 18" floating head: 248lb (113kg), 22" floating head: 252lb (114kg) (all weights are with catcher, grooved steel roller and kickstand)
--------	--

SOUND LEVEL

MOWER SOUND LEVEL	88 dBA
-------------------	--------

WARRANTY

MOWER WARRANTY	2 Years
----------------	---------

ROLLERS

- 22" (55.9 cm) Grooved segmented machined aluminum roller - 2 1/4" (5.7cm) dia.
- 22" (55.9 cm) Hollow tube steel roller with scraper (light duty) - 2" (5.1cm) dia.
- 22" (55.9 cm) Solid tube steel roller with scraper (heavy duty) - 2" (5.1cm) dia.
- 22" (55.9 cm) Grooved machined steel roller - 2 1/4" (5.6cm) dia.
- 22" (55.9 cm) Grooved machined aluminum roller - 2 1/4" (5.6cm) dia.



ACCESSORIES

- Turf Groomer: 22" (55.9cm) width and 0.25" (6.3mm)
- Verticut Unit
- Bi-directional groomer / Brush
- LED light kit
- Mower Caddy Trailer
- Push Brush Attachment

Distributor

PT. SAHABAT AGRITAMA

Alamat: No. 1. Blok B1 - B2 Jl. Gn. Sahari RT.16/RW. 3 Gn. Sahari Utara. Kecamatan Sawah Besar, Kota Jakarta Pusat, Daerah Khusus Ibukota Jakarta 10720

Informasi

- ☎ (021) 6594011
- ☎ 082 125 406 086
- ✉ sahabatagritama@sahabatgroup.com
- 🌐 www.sahabatagritama.com